

FIRE EXTINGUISHING GROUPS

CTDGROUP

CTD Group has been moving forward for more than 30 years with the same requirement: to learn, master and perfect its experiences, skills and the quality of its products. The group has become a key player in the maintenance of green spaces through garden cultivation, spraying, watering and dosing. It is also recognized in the world of firefighting for its dosing, transfer and high pressure equipment.

Fostering innovation and long-term vision, CTD Group is diversifying its activities and expanding its geographic reach from France to the international stage. CTD Group manages the activities of the companies CTD and YVMO. The head office is based in Guéreins, north of Lyons, FRANCE.





COMPANY STRENGHTS



CUSTOMER RELATIONSHIP

5 sales managers Supplying more than 60 countries Demonstration and training on site Tailor-made quotations



R&D

Customised design 5% of the turnover in R&D 3D SolidWorks software Technical documentation customised



QUALITY


ISO 9001 2015 Performance monitoring indicators Testing station UTAC approval



AFTER SALES SEVICE

Helpline On-site intervention Equipment maintenance Spare Parts department

SALES TERRITORIES | 3

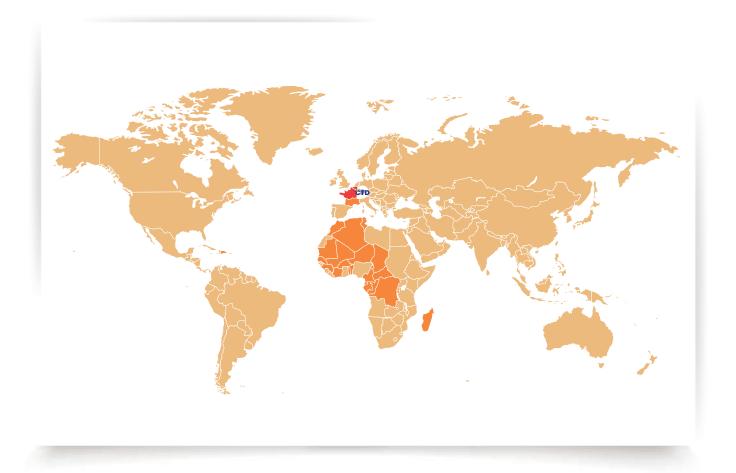



EUROPE REST OF THE WORLD François CHEVERRY E-mail : fcheverry@ctdfrance.com Tel. : +33 (0)6 03 86 72 13



NORTH FRANCE BENELUX Vincent LEQUEUCHE E-mail : vlequeuche@ctdfrance.com Tel : +33 (0)6 34 35 91 24



SOUTH FRANCE FRENCH OVERSEAS TERRITORIES FRENCH SPEAKING AFRICAN COUNTRIES Fabrice CECILLON E-mail: fcecillon@ctdfrance.com Tel: +33 (0)6 48 43 75 68

Sales assistant Adeline DESPRES E-mail: adespres@ctdfrance.com Tel: +33 (0)4 74 06 47 01 Fax: +33 (0)4 74 06 47 09


4 | TRIOCEROS



A

FEATURES

| * Per default | THERMAL | ELECTRIC | HYDRAULIC |
|-----------------|---|--------------|--------------|
| Pump type | Piston | | |
| Pump flow | 21 lpm | 21 lpm | 15 or 21 lpm |
| Pressure | 200 bar | 150 bar | 200 bar |
| Dosing range | 0.1 to 1% | | |
| Power | Thermal (Diesel or Petrol) | Electric | Hydraulic |
| Length of hose* | 25m hose | | |
| Configuration | Possibility of supplying as a kit OR as a complete group on a frame with water and product tank | | |
| Public rate | From 6 232 € | From 6 232 € | From 5 410 € |

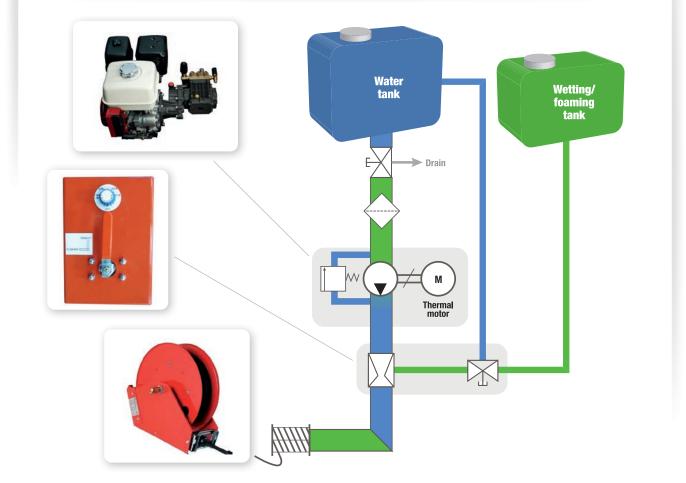


POSSIBLE OPTIONS



Mud vacuum device



Isolation valve




40m reel

Tank filling hydro-injector

TRIOCEROS | 5

A

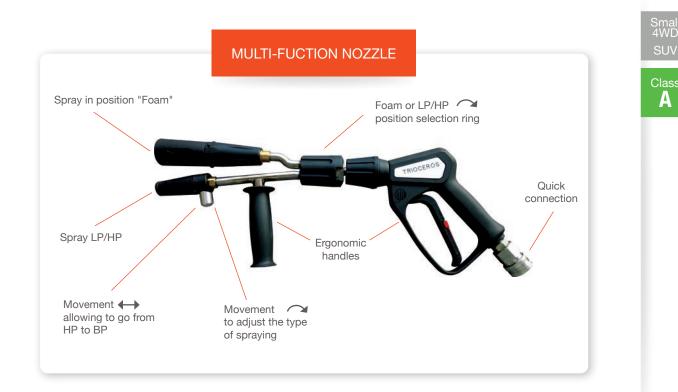






6 | LOW PRESSURE GROUPS

Small 4WD SUV

FEATURES

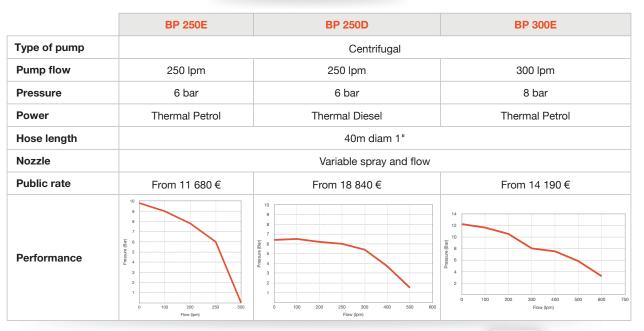

REEL

Manual hose reel powered by the pump and equipped with 40 meters of semi-rigid Ø 1" hose crimped with GFR fittings.

WATER TANK




MOTOR PUMP

pressure gauge.

Centrifugal aluminum motor pump connected to the tank or to external suction comprising 1 DSP40 outlet, 2 DN25 outlets and equipped with a

Custom-made 12 mm HDPE tank adapted to the shape of the vehicle, equipped with an anti-balan Ball Baffle system, a vent, a visual tank level and a DSP40 filling



NOZZLE

Nozzle cast in aluminum alloy, «cut teeth» diffusion head with variable flow and jet, opening by operating handle. 4 flow positions: 40/75/100/150 lpm at 6 bar



FRAME

Custom-made aluminum profile frame with extension for loading by forklift truck and equipped with attachment points for Pickup skips.

HIGH PRESSURE GROUPS | 7

FEATURES

| | HP 50E | HP 50D | |
|--------------|--|--|--|
| Type of pump | Piston Diaphragms | Piston Diaphragms | |
| Pump flow | 50 lpm | 50 lpm | |
| Pressure | 40 bar | 40 bar | |
| Power | Thermal Petrol | Thermal Diesel | |
| Hose length | 40m diam 1/2" | 40m diam 1/2" | |
| Nozzle | Full stream or spraying jet submachine gun | Full stream or spraying jet submachine gun | |
| Public rate | From 8 415 € | From 11 415 € | |

Small 4WD SUV

REEL

Hand-wound hose reel powered by the pump and equipped with 40 meters of flexible Ø $1/2^{"}$ crimped hose.



Custom-made 12 mm HDPE tank adapted to the shape of the vehicle, equipped with an anti-balan Ball Baffle system, a vent, a visual tank level and a DSP40 filling.



Piston / diaphragm motor pump connected to the tank including 2 u. 1/2" outlets and equipped with a pressure gauge

NOZZLE

Submachine gun type nozzle allowing a full stream or a spraying jet by means of an ergonomic handle.

FRAME

Custom-made aluminum profile frame with extension for loading by forklift truck and equipped with attachment points for Pickup skips.







HEAD QUARTERS 11 rue de l'Industrie Parc d'entreprises Visionis - 01090 GUÉREINS FRANCE Tel: +33 (0)4 74 06 47 00 Fax: +33 (0)4 74 06 47 09 E-mail: info@ctdfrance.com www.ctdfrance.com

